



FULLERPHONES OFFICE, MK. I. & MK. I*

THE DIAGRAM SHOWS THE MK I*. IN THE MK I, INST CONDENSER "A" IS 2 M.F., CONDENSERS "B" & "C" ARE OMITTED, & CONDENSER "D" ADDED; ALSO CHOKE COIL "E" IS 200", & CHOKE COIL "F" IS OMITTED. LATER ISSUES OF BOTH MARKS HAVE NO POTENTIOMETER THE CALL IS RECEIVED IN HAND RECVR, FULLERPHONE SIGNALS IN HEAD RECVR. OUTGOING FULLERPHONE SIGNALS ARE INAUDIBLE IN EITHER RECVR. YOU CAN SPEAK AND FULLERPHONE AT SAME TIME BUT THE SPEECH CAN BE OVERHEARD

ON CLOSING BOX THE LID OPERATES SWITCHES Z.

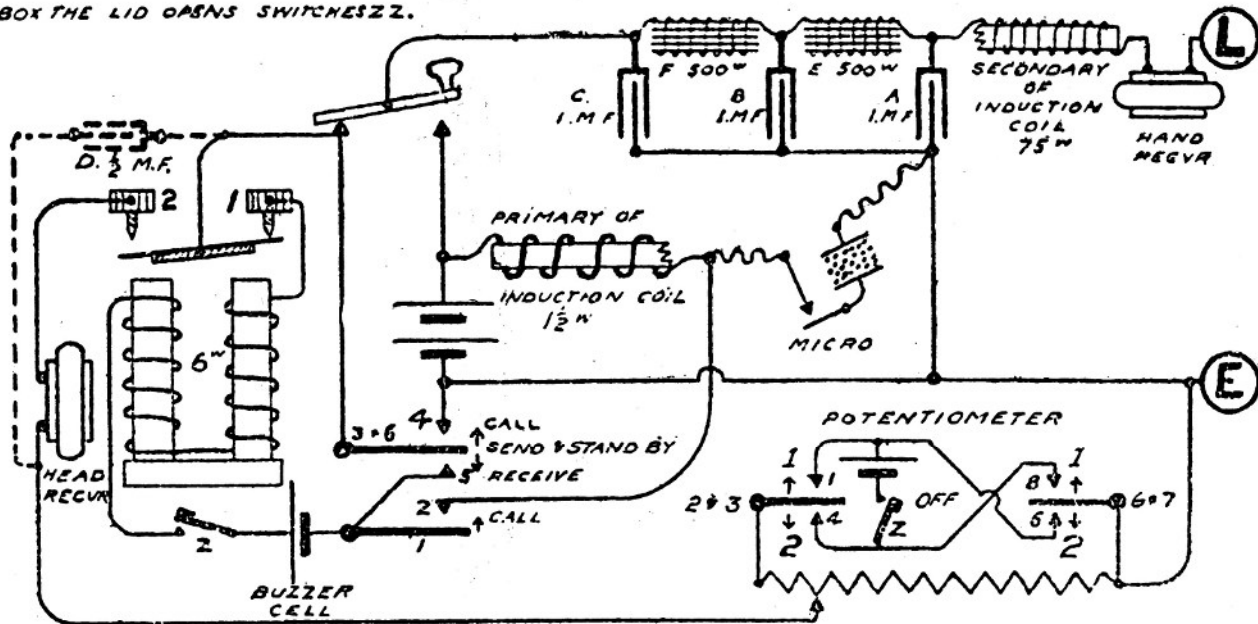

CALL & RECEIVE SWITCH

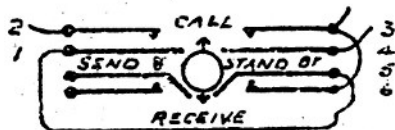

ACTUAL ARRANGEMENT OF SWITCHES

POTENTIOMETER SWITCH

