Supplement Chap. 284 - 1



HSGT M-4/FRM-2 Country of origin: Denmark

(Alert receivers #3)

DATA SUMMARY

Organisation: Probably Civil Defence, Denmark. Design/Manufacturer: Tesam Electric, Denmark.

Year of Introduction: 1967. Purpose: Warning/alert receiver.

Frequency coverage: 1500-6200KHz in three ranges:

1.5-3MHz, 3-4.5MHz, 4.5-6.2MHz.

Circuit features: Single conversion superheterodyne. RF, mixer, osc., IF, Det., AVC, BFO, AF. AM and CW.

Intermediate frequency: 1000kHz. AF output: Internal loudspeaker only.

Aerial: Wire.

Power Supply: 9 'D' 11/2V batteries or external 12V.

Dimensions (mm) and weight:

Height 163, length 233, width 380; 5kg.



Bottom view of the FRM-2 receiver showing battery compartment (separate unit right), control push buttons (top right), IF/BFO/AVC board (bottom), AF/BFO/power board (right) and RF assembly (left).

References:

- Photographs and information courtesy Jan Poortman PA3ESY, Holland. www.pa3esy.nl
- http://www.jyskkoldkrigsforening.dk/varslingstjenesten

REMARKS

The HSGT M-4/FRM-2 was a portable warning receiver believed to be used by the Danish Civil Defence.

The receiver was fully transistorised, enclosed in a metal enclosure with a removable protective lid over the front panel. Its electrical design and mechanical construction reflected that of commercial broadcast radio receivers of that era. It was powered by nine 1½V 'D' cells which were located in a separate compartment on the right hand side of the front panel. Provision was made to connect an external 12V DC source via sockets on the front panel.



Right hand view of front panel with battery compartment opened (left).


> Left hand side view with connections to aerial and earth (below).



© This WftW Volume 4 Supplement is a download from www.wftw.nl. It may be freely copied and distributed, but only in the current form.

Wireless for the Warrior - Volume 4

Supplement Chap. 284 - 2

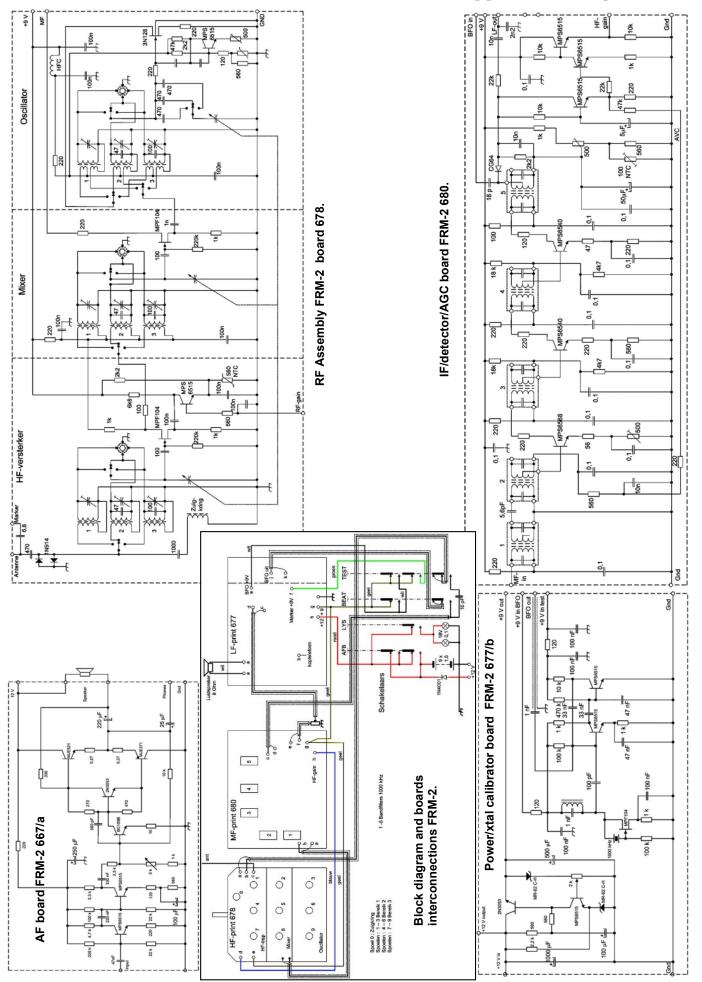

© This WftW Volume 4 Supplement is a download from www.wftw.nl. It may be freely copied and distributed, but only in the current form.